


**TORO****590GF SERIES
SPRAYS**

BUILT FOR TOUGH GOLF COURSE ENVIRONMENTS

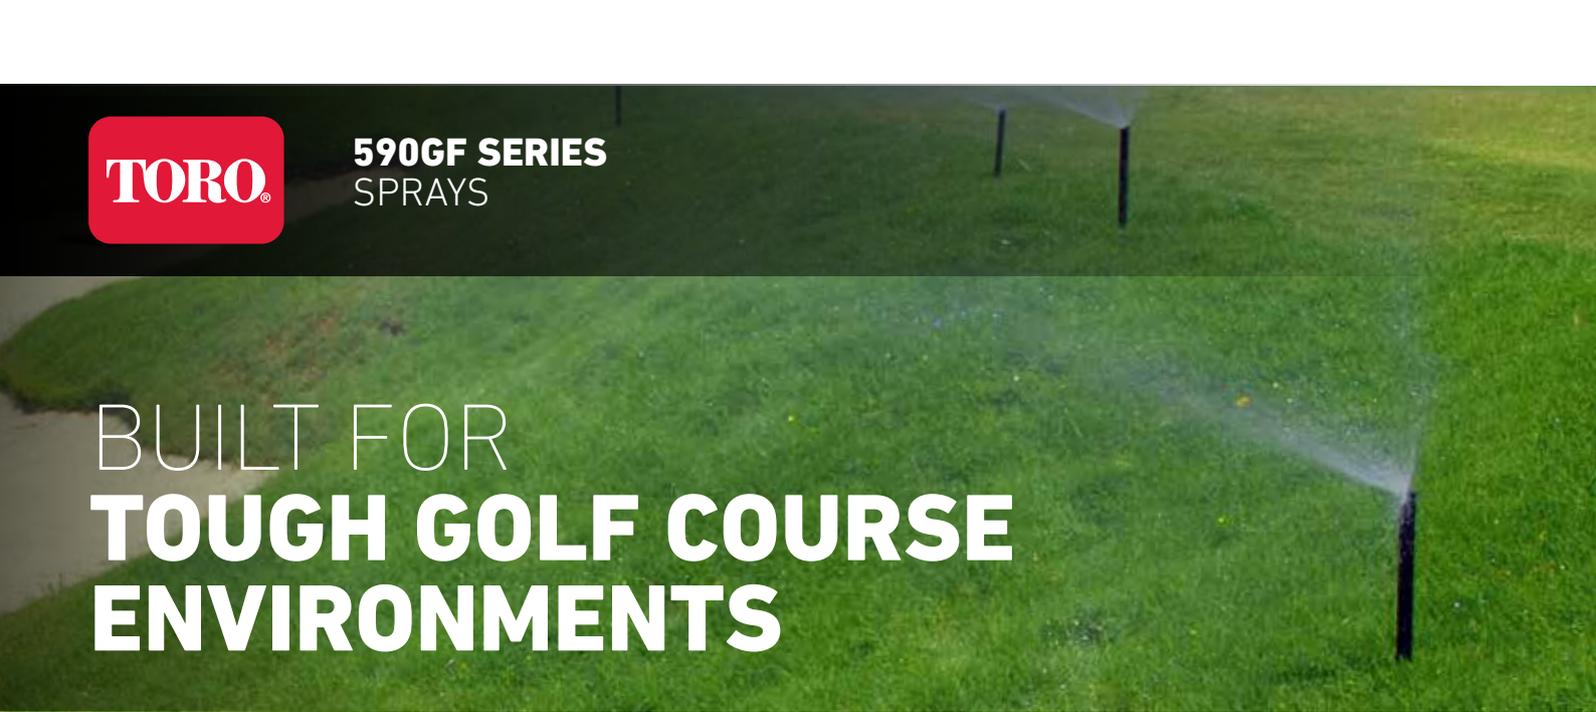

FEATURES

The Toro 590GF Series is the first spray head designed specifically for golf course irrigation with enhanced water management capabilities.

The 590GF is built for the tough golf course environment, including harsh debris situations like top-dressing and sand, high water pressures, and daily mower and foot traffic. The 590GF is perfect around bunkers, on small tee boxes, and around the clubhouse. And with its patented X-Flow technology, the 590GF has a built-in shutoff device should a nozzle be damaged or removed and its standard check valve feature minimizes low head drainage.

■ Nozzle Options

In addition to the full line of Toro MPR, T-VAN and specialty nozzles the 590GF accepts the revolutionary Precision™ Spray and Precision™ Rotating Series nozzles with optimized distribution uniformity that provides exceptional turf conditions with minimal water usage.

■ Designed Flush Rate

Sprinkler flushes during pop-up and retraction clearing debris from around the riser to eliminate stick-ups and ensure positive sealing and retraction.

■ X-Flow® Shut Off Device

The X-Flow shut off feature stops the flow of water if the nozzle is damaged or removed to eliminate flooding, water waste and soil erosion.

■ Prevent Low Head Drainage

The standard check valve prevents low head drainage with up to 3 m (10') of elevation change minimizing soil erosion and water waste.

590GF SERIES
SPRAYS



590GF-4

590GF-6

590GF-12

ADDITIONAL 590G SERIES FEATURES



FLANGED CAP

Flanged cap installs below grade to stabilize the body position and maintain optimum nozzle performance.



WITH X-FLOW

X-Flow eliminates water waste, soil erosion and flooding



WITHOUT X-FLOW

Water waste, soil erosion and flooding occur

590G SERIES SPECIFICATIONS

OPERATING SPECIFICATIONS

- Radius: 0,6 – 7,9m (2' – 26')
- Recommended pressure range: 1,7 – 3,4 bar (25-50 psi)
maximum – 5,2 bar (75 psi)
- Flow rate: 0,15 – 17,8LPM (0.04 – 4.71 gpm)
- 2 gpm flush rate

ADDITIONAL FEATURES

- Stainless steel retraction spring
- All bodies shipped with flush plug in place
- Ratcheting riser feature for arc adjustment

DIMENSIONS

- Body diameter:
 - 34,9mm (1.375") on 4P and 6P
 - 41,275mm (1.625") on 12P
- Cap diameter: 50,8mm (2")
- Inlet: 12,7mm (0.5") female-threaded

WARRANTY

- Two years; Five years when installed with Toro Swing Joints

590G SERIES ACCESSORIES AND UPGRADES

Risers and Extenders

570-6X

- Male-inlet threads install onto any 590GF sprinkler or to provide a 15,2cm (6") extension
- Maximum pressure: 5,2 bar (75 psi)

570SR-6 and 570SR-18 Risers

- 12,7mm (0.5") male-threaded inlet for installation on pipe fittings
- Maximum pressure: 5,2 bar (75 psi)
- Height: 15,2cm and 45,7 (6" and 18")



590G SERIES SPECIFYING INFORMATION

590GF SERIES SPRAYS

590GF-XX	
Model Number	Description
590GF-4	10,2cm (4") Pop-Up
590GF-6	15,2cm (6") Pop-Up
590GF-12	30,5cm (12") Pop-Up

toro.com

©2024 The Toro Company. All Rights Reserved. 24-326-GB

Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.

toro.com

